


ENG

[www.cast-group.it](http://www.cast-group.it)

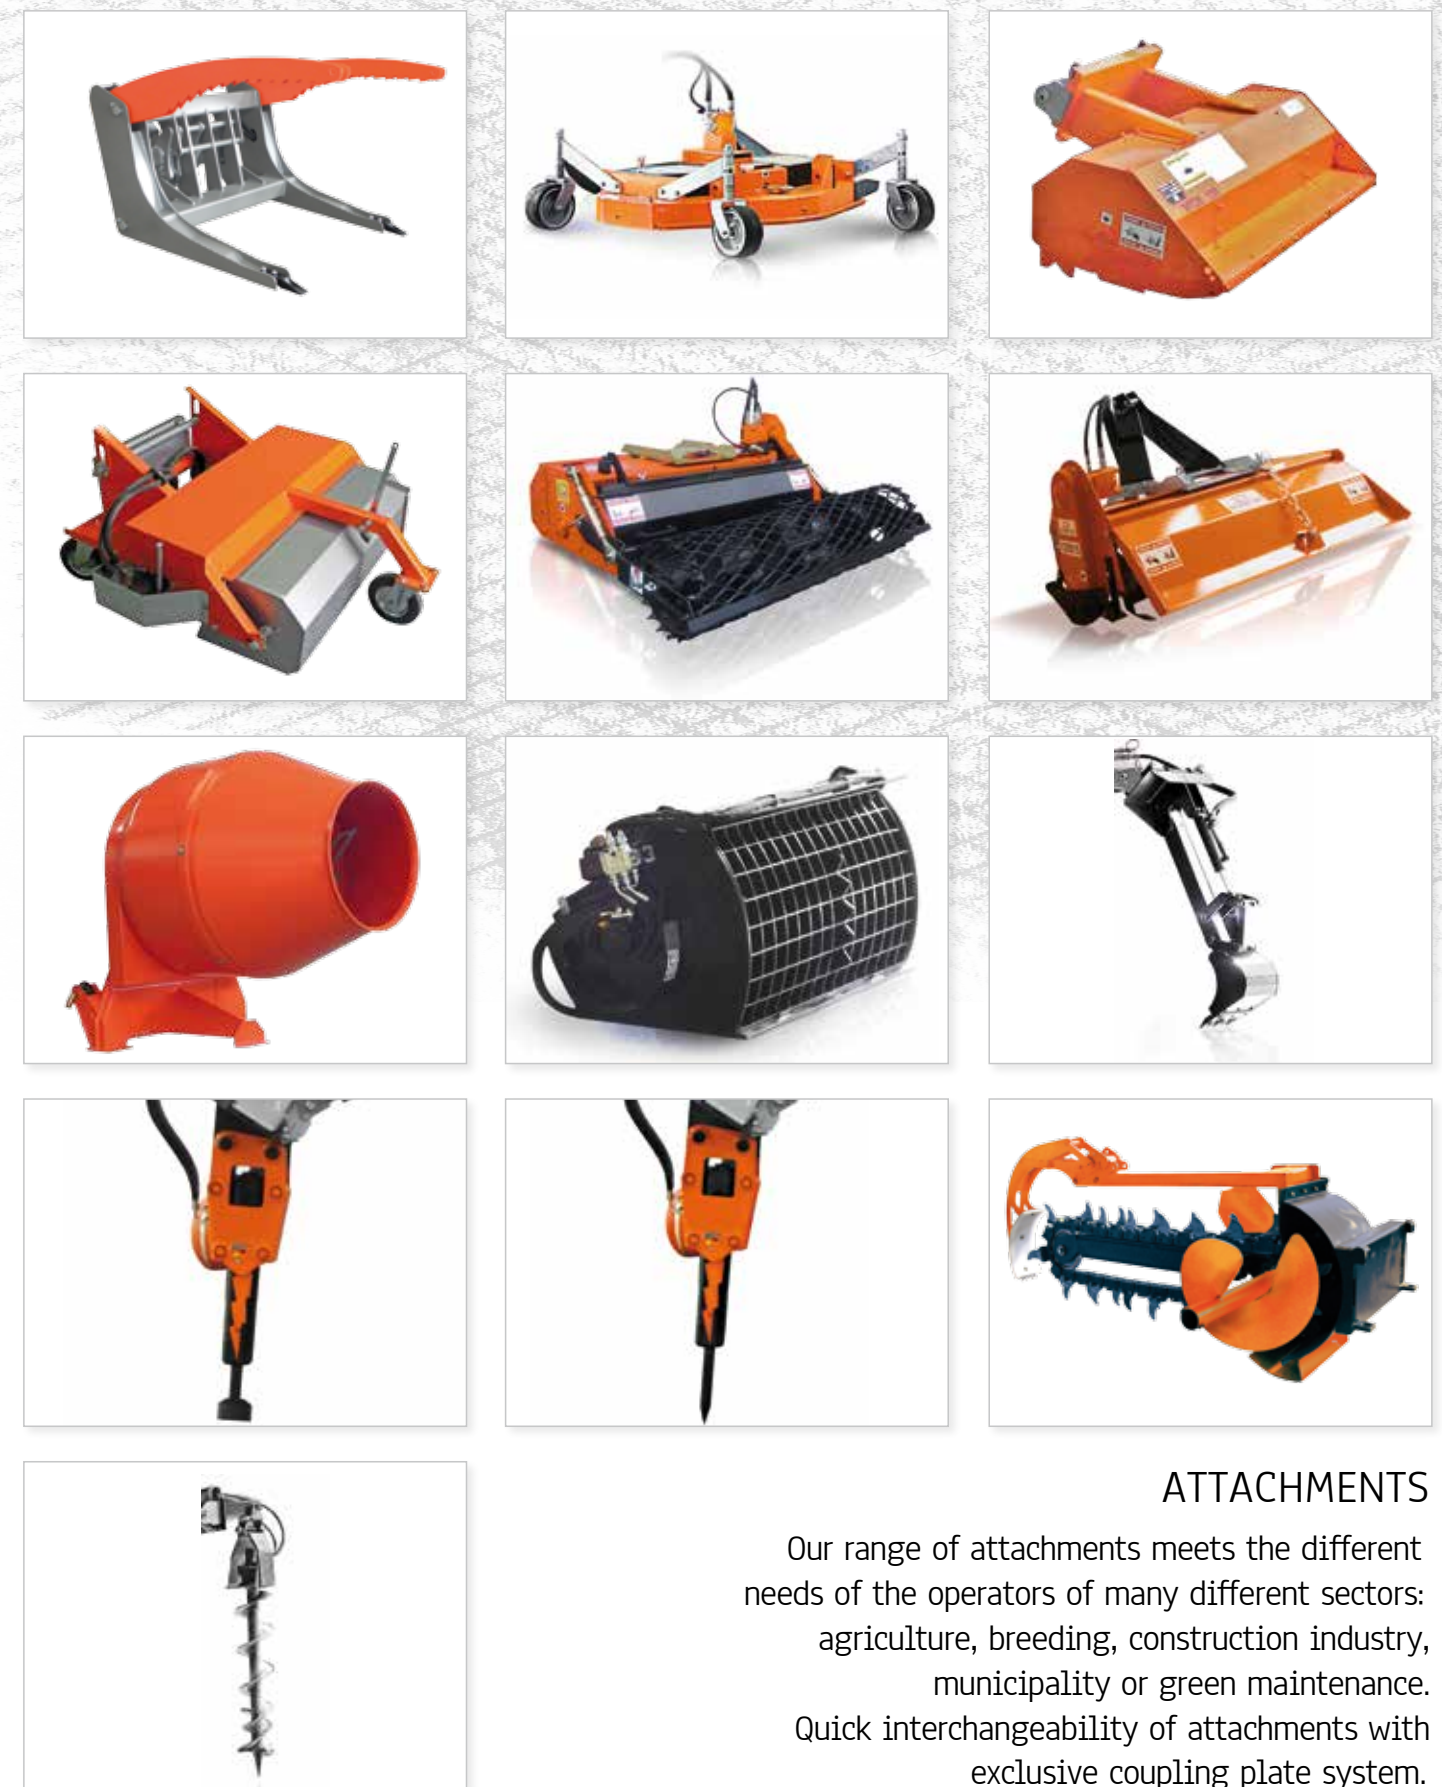

**ATTACHMENTS**

Our range of attachments meets the different needs of the operators of many different sectors: agriculture, breeding, construction industry, municipality or green maintenance. Quick interchangeability of attachments with exclusive coupling plate system.

  
**CASTGROUP**  
 CAST GROUP S.r.l. UNIPERSONALE  
 Via A. Meucci, 18  
 30035 Mirano (VE) Italy  
 tel. +39 041 5701827  
 info@cast-group.it

Data contained in this document is subject to change without notice and/or notification. Cast Group reserves the right to modify its products without obligation to communications. The images in this document are the only a demonstrative purpose. Selling products may be subject to change in appearance, about accessories, on the technical specifications and for the safety features.

**CASTLOADERS**

TV\_A44-2017/ENG

# CASTLOADERS

## 20T/25T

Engine	Diesel Isuzu
Power/cylinders	22Hp/16,3 Kw - 25Hp/18,2 Kw -3 cyl
Cooling	liquid
Transmission	hydrostatic 4WD
Speed	12 km/h
Steering	articulated frame
Differential	manual
Hydraulic outlet	26 l./min. - 34 l./min.
Boom height	mm. 2777
Joystick	standard
Selfleveling	standard
Working lights	2 ant.+ 1 post. (opt. 20T)
Safety protection	ROPS+FOPS
Windscreen	Option
Cab+heating	no
Anti -Stall (AST)	integrated ( A.S.T.) not for 20T
Hoods front/rear	steel
Tyres	23x8.50-12 / 26x12.00-12
Size (WxLxh)	mm.1200x2350x2000
Weight	Kg.1060



# CASTLOADERS

## 35T

Engine	Diesel Isuzu
Power/cylinders	38 Hp. / 28Kw- 3 cylinders
Cooling	liquid
Transmission	hydrostatic - 4WD
Speed	16 km/h
Steering	articulated frame
Differential	manual
Hydraulic outlet	48 l./min.
Boom height	mm. 2700
Joystick	option
Selfleveling	option
Working lights	option
Safety protection	ROPS
Windscreen	no
Cab+heating	Option
Anti -Stall (AST)	no
Hoods front/rear	thermof./ steel
Tyres	26x12.00-12
Size (WxLxh)	mm.1200x2350x2213
Weight	Kg. 1260



# CASTLOADERS

## 41T

Engine	Diesel Isuzu
Power/cylinders	38 Hp. / 28Kw- 3 cylinders
Cooling	liquid
Transmission	hydrostatic - 4WD
Speed	16 km/h
Steering	articulated frame
Differential	electrical
Hydraulic outlet	66 l./min.
Boom height	mm. 2700
Joystick	standard
Selfleveling	standard
Working lights	2 front+ 1 rear
Safety protection	ROPS+FOPS
Windscreen	no
Cab+heating	Option
Anti -Stall (AST)	no
Hoods front/rear	thermof./ steel
Tyres	26x12.00-12
Size (WxLxh)	mm.1200x2350x2213
Weight	Kg. 1260



# CASTLOADERS

## 45T/4WS

Engine	Diesel Isuzu
Power/cylinders	38 Hp. / 28Kw- 3 cylinders
Cooling	liquid
Transmission	hydrostatic - 4WD
Speed	16 km/h
Steering	articulated frame+4 wheel steering
Differential	electrical
Hydraulic outlet	60 l./min.
Boom height	mm. 3300
Joystick	standard
Selfleveling	standard
Working lights	2 front+ 1 rear
Safety protection	ROPS+FOPS
Windscreen	Standard
Cab+heating	Option
Anti -Stall (AST)	integrated
Hoods front/rear	steel
Tyres	PR10 10/16,5
Size (WxLxh)	mm.1350x2520x2270
Weight	Kg. 2100



On request available with:  
Independent Hydraulic System